
# SERIES 400 CABLE RAILING INSTALLATION INSTRUCTIONS

REVISION 0.0 (4/16/2020)

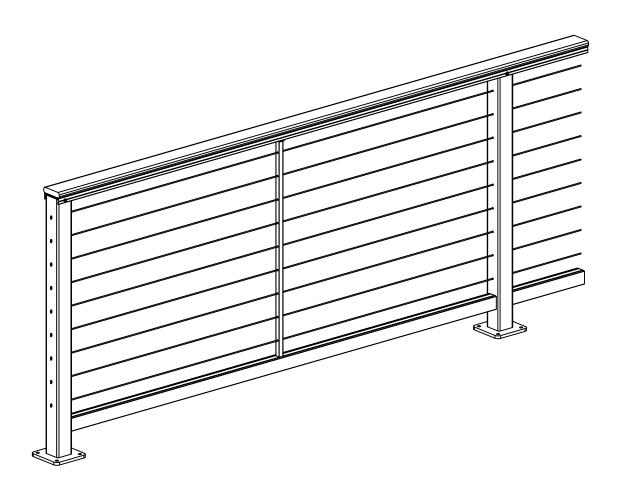


PLEASE READ THESE INSTRUCTIONS IN THEIR ENTIRETY PRIOR TO ASSEMBLING RAILING. IF YOU HAVE ANY QUESTIONS OR NEED ASSISTANCE, PLEASE CALL ONE OF THE NUMBERS BELOW.


## **DRAWING TITLE:**

OVERVIEW, RAILING

DATE: 4/16/2020 DRAWN BY: TJC



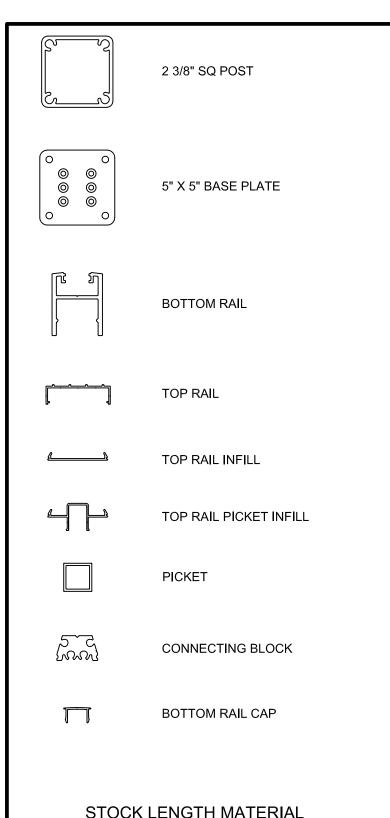

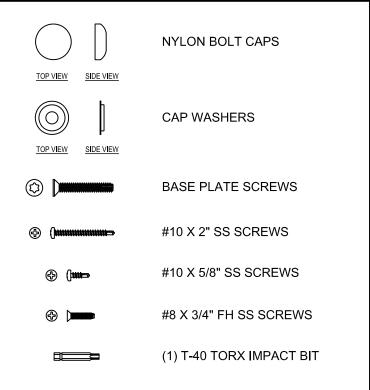

#### **HARDWARE**

#### **RECOMMENDED TOOLS**


- SCISSORS
- CENTER PUNCH
- DRILL
- Ø11/64" AND Ø5/16" DRILL BITS
- MASKING TAPE
- SOAP
- #2 PHILLIPS SCREW DRIVER BIT
- IMPACT DRIVER
- LEVEL
- PENCIL
- TAPE MEASURE
- STRING LINE
- SHIMS
- SPEED SQUARE
- ELECTRIC MITER SAW WITH A 10" CARBIDE BLADE SPECIFICALLY FOR CUTTING ALUMINUM
- RUBBER MALLET
- 4" C-CLAMP
- CABLE CUTTER
- CABLE SWAGE TOOL

### **DRAWING TITLE:**

## OVERVIEW, PARTS LIST

DATE: 4/16/2020 DRAWN BY: TJC



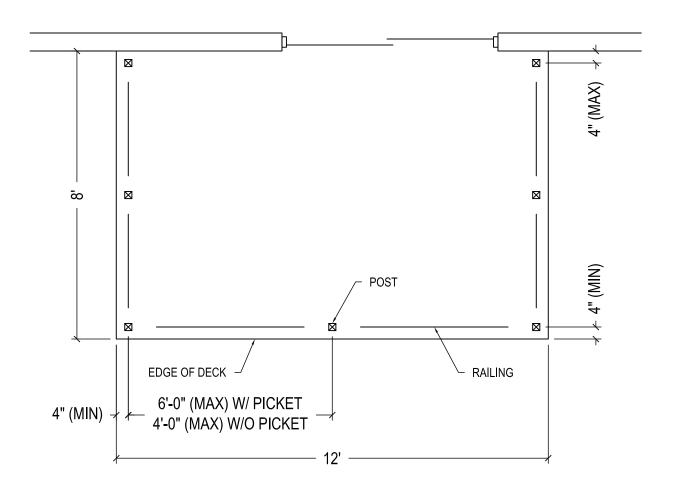

## SAMPLE DECK PLAN

NOT TO SCALE

#### THINGS TO NOTE:


- WHICH SIDES OF YOUR POSTS GET DRILLED FOR RAILING CONNECTION BLOCKS.
- MAXIMUM POST SPACING IS 6-0" FROM CENTER OF POST TO CENTER OF POST WITH A MID-SPAN PICKET.
- MAXIMUM POST SPACING IS 4'-0" FROM CENTER OF POST TO CENTER OF POST WITHOUT A MID-SPAN PICKET.
- ALL GAPS, INCLUDING THE SPACE BETWEEN A WALL AND A POST CANNOT EXCEED 4".
- THE CENTERLINE OF YOUR RAILING SHOULD BE A MINIMUM OF 4" FROM THE EDGE OF DECK.
- IT IS RECOMMENDED THAT YOU SHOULD SPACE YOUR POSTS AN EQUAL DISTANCE APART WHEREVER POSSIBLE.

### **DRAWING TITLE:**

OVERVIEW, SAMPLE DECK PLAN

DATE: 4/16/2020 DRAWN BY: TJC




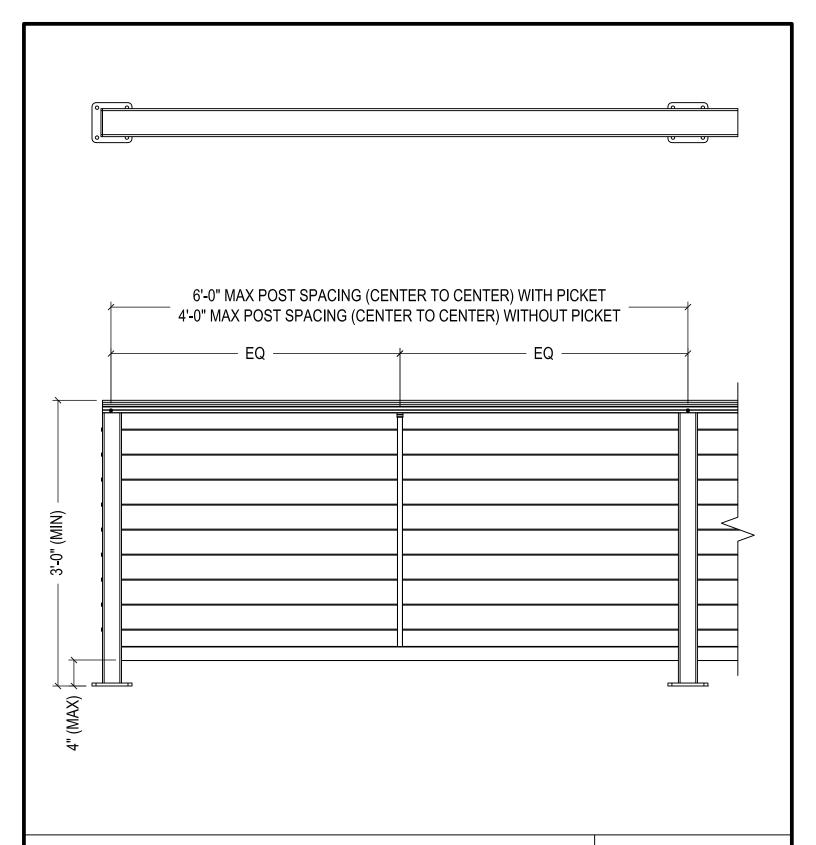


# DRAWING TITLE: OVERVIEW, DIMENSIONS

DATE: 4/16/2020 DRAWN BY: TJC



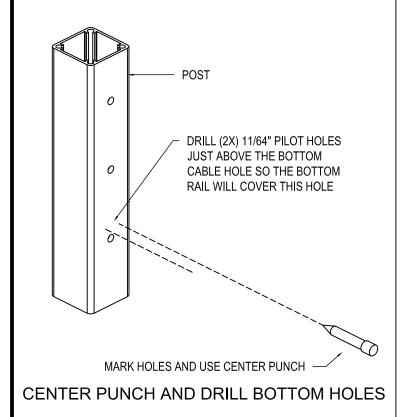

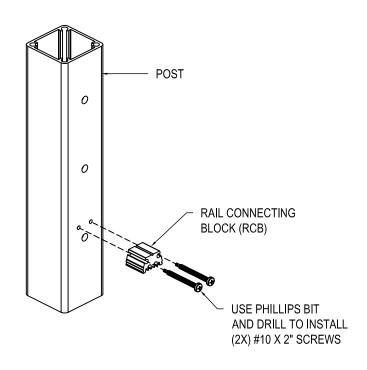


**INSTALL BOTTOM CONNECTING BLOCK** 

**DRAWING TITLE:** 

STEP 1: RCB INSTALLATION

DATE: 4/16/2020 DRAWN BY: TJC



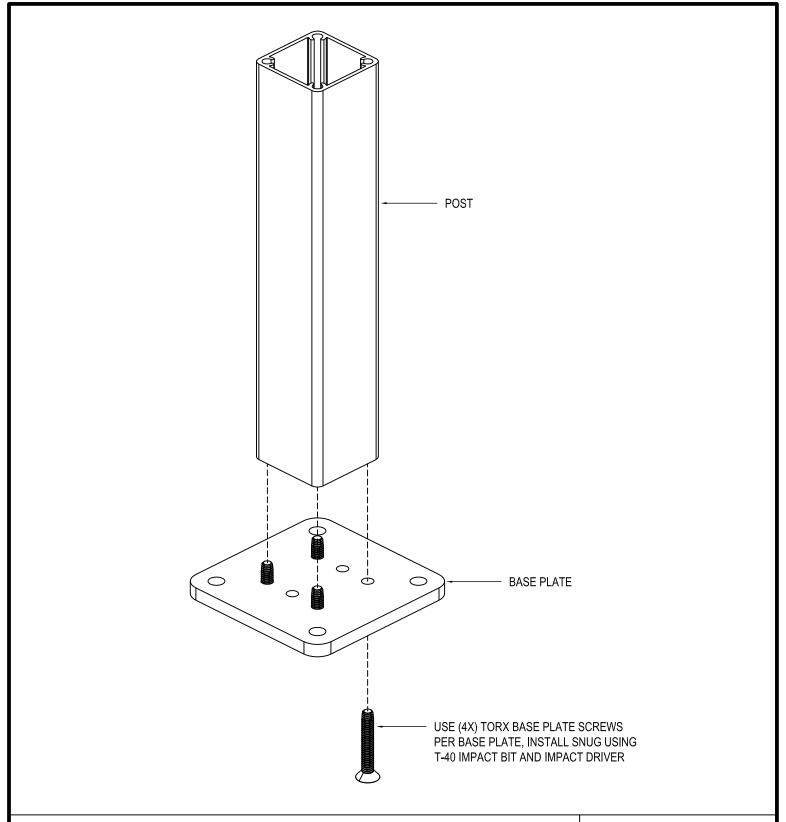


**DRAWING TITLE:** 

STEP 2: BASE PLATE INSTALLATION

DATE: 4/16/2020 DRAWN BY: TJC



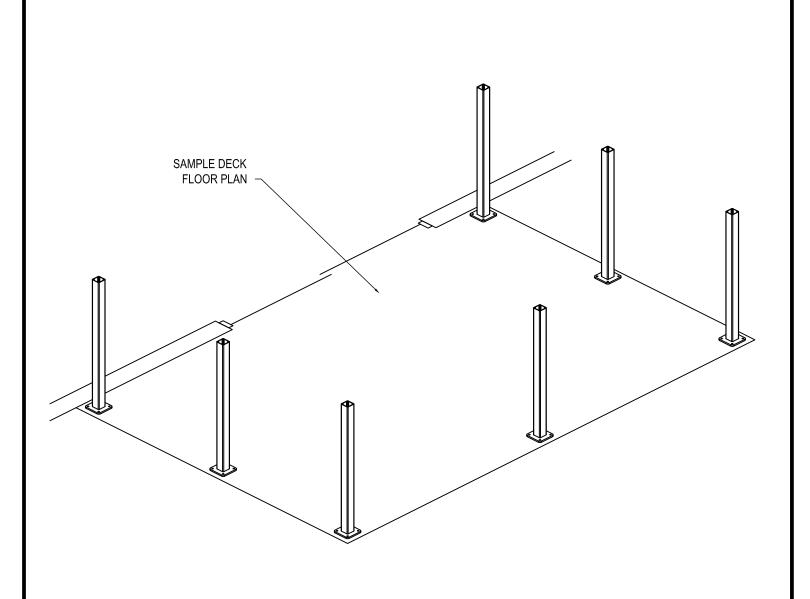

#### THINGS TO NOTE:


- USING A TAPE MEASURE AND A STRING LINE, PLACE ALL OF YOUR POSTS IN THEIR PROPER LOCATIONS PER YOUR DECK PLANS. ENSURE THAT YOUR CABLES HOLES ARE ALL IN THE PROPER ORIENTATION.
- USE A LEVEL ON TWO ADJACENT SIDES OF EACH POST TO ENSURE THE POST IS PLUMB. IF IT IS NOT, USE SHIMS AS REQUIRED UNDER THE BASE PLATE.
- BE SURE TO FOLLOW MINIMUM AND MAXIMUM DIMENSIONAL REQUIREMENTS AS LISTED ON THE SAMPLE DECK PLAN.

## **DRAWING TITLE:**

STEP 3: PLACING THE POSTS

DATE: 4/16/2020 DRAWN BY: TJC



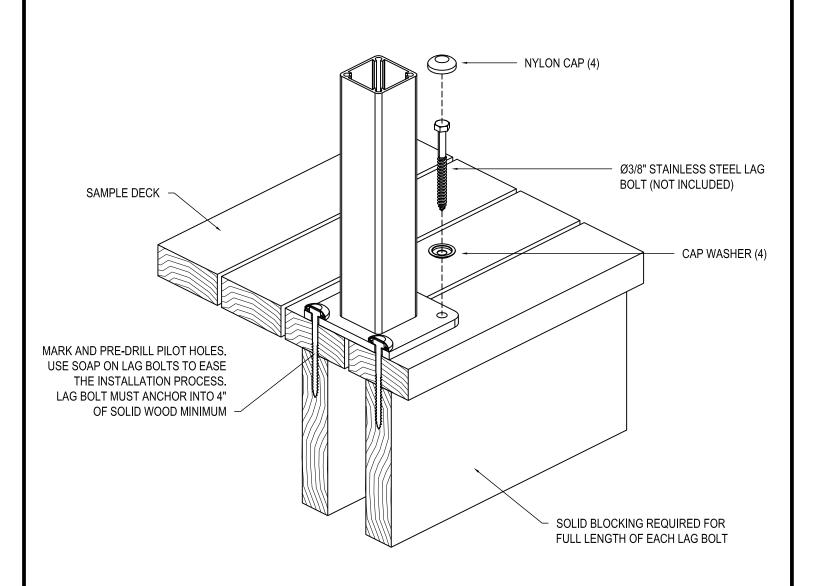

## SAMPLE ONLY

LAG BOLTS NOT INCLUDED


**DRAWING TITLE:** 

STEP 3: TYP WOOD CONNECTION

DATE: 4/16/2020

DRAWN BY: TJC



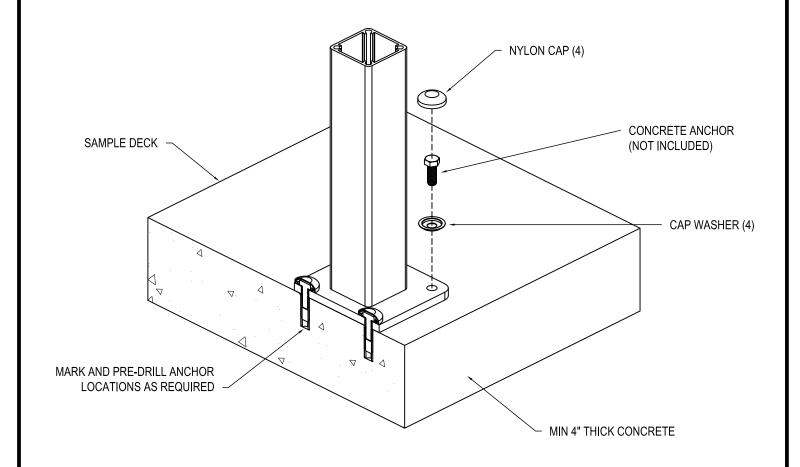

# SAMPLE ONLY


ANCHOR BOLTS NOT INCLUDED

**DRAWING TITLE:** 

STEP 3: TYP CONCRETE CONNECTION

DATE: 4/16/2020 DRAWN BY: TJC



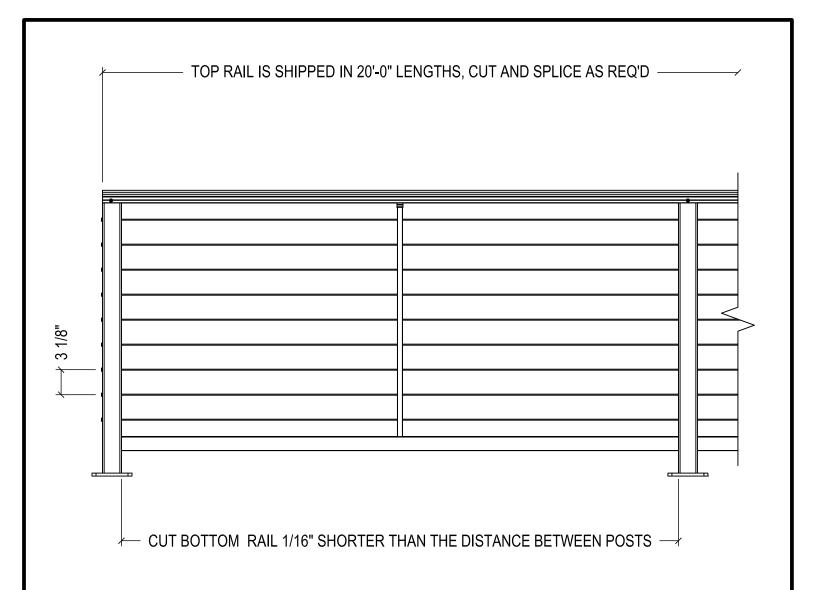

#### THINGS TO NOTE:


- INSTALL ALL POSTS BEFORE CUTTING TOP AND BOTTOM RAILS.
- USE AN ELECTRIC MITER SAW WITH A 10" CARBIDE BLADE SPECIFICALLY FOR CUTTING ALUMINUM.
- CUT AND DOUBLE CHECK FIT BEFORE ATTACHING RAILS WITH SCREWS

## **DRAWING TITLE:**

STEP 4: TOP AND BOTTOM RAIL

DATE: 4/16/2020 DRAWN BY: TJC



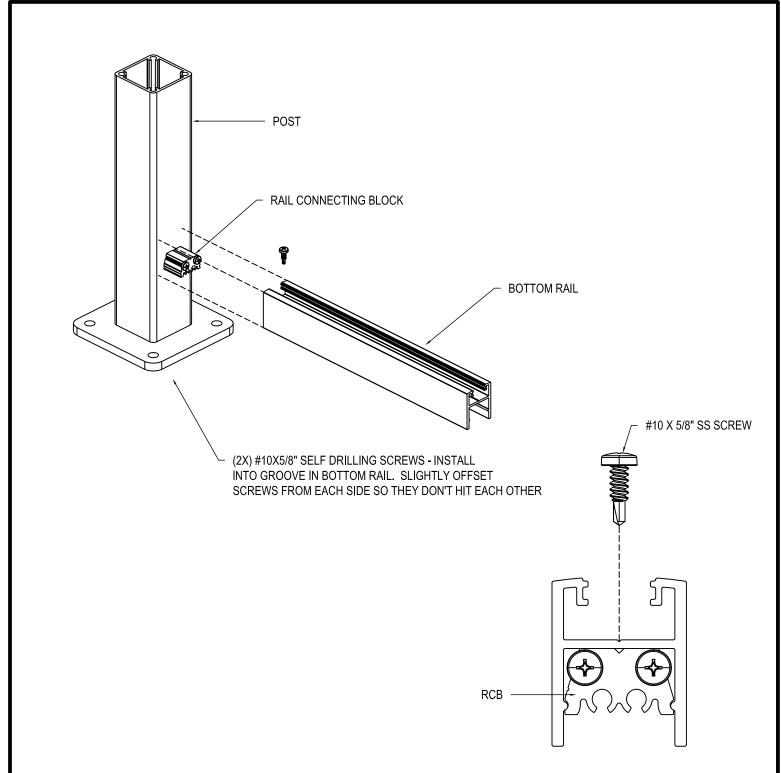


# INSTALL BOTTOM RAIL BEFORE TOP RAIL


**DRAWING TITLE:** 

STEP 4: BOTTOM RAIL INSTALLATION

DATE: 4/16/2020 DRAWN BY: TJC



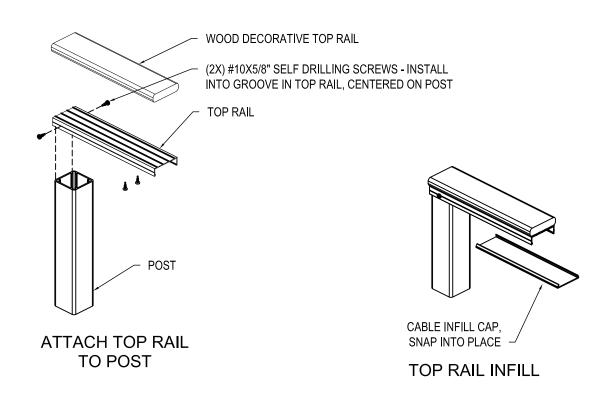

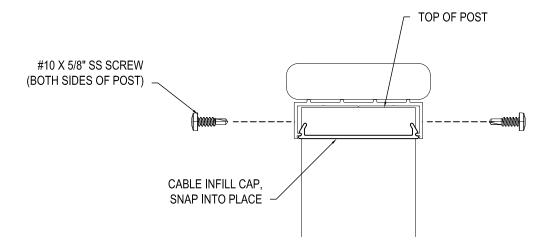


# INSTALL BOTTOM RAIL BEFORE TOP RAIL


**DRAWING TITLE:** 

STEP 4: TOP RAIL INSTALLATION


DATE: 4/16/2020 DRAWN BY: TJC



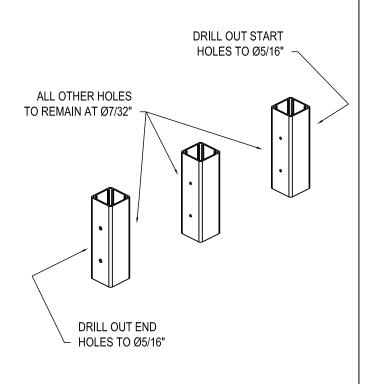


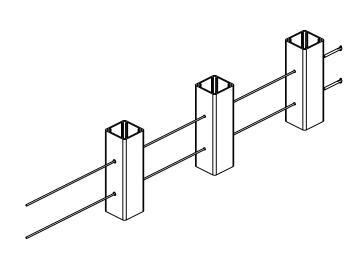

IT IS RECOMMENDED TO INSTALL CABLES LOOSELY PRIOR TO INSTALLING TOP RAIL, STARTING WITH THE BOTTOM CABLE AND WORK UP. THIS IS SO YOU CAN EASILY SEE THE CABLES INSIDE THE POSTS.

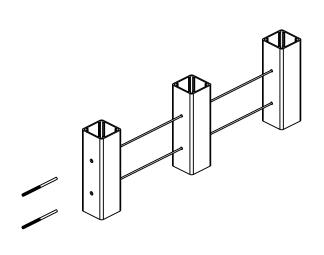

INSTALL THREADED TERMINALS. (SEE NEXT PAGE FOR DETAILS)

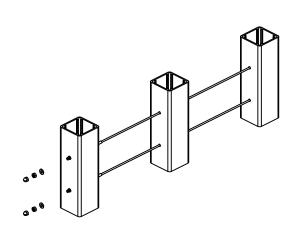


INSTALL WASHER, NUT, AND ACORN NUT. TENSION CABLES AS REQ'D

## **DRAWING TITLE:**

STEP 5: CABLE INFILL

DATE: 4/16/2020 DRAWN BY: TJC



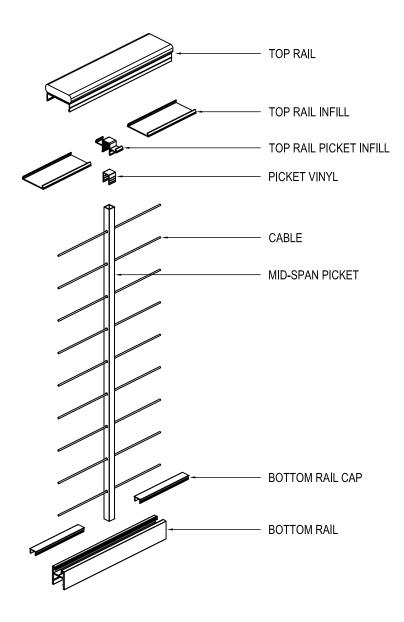


# MID-SPAN PICKET DETAIL

**DRAWING TITLE:** 

STEP 5: CABLE INFILL / PICKET

DATE: 4/16/2020 DRAWN BY: TJC



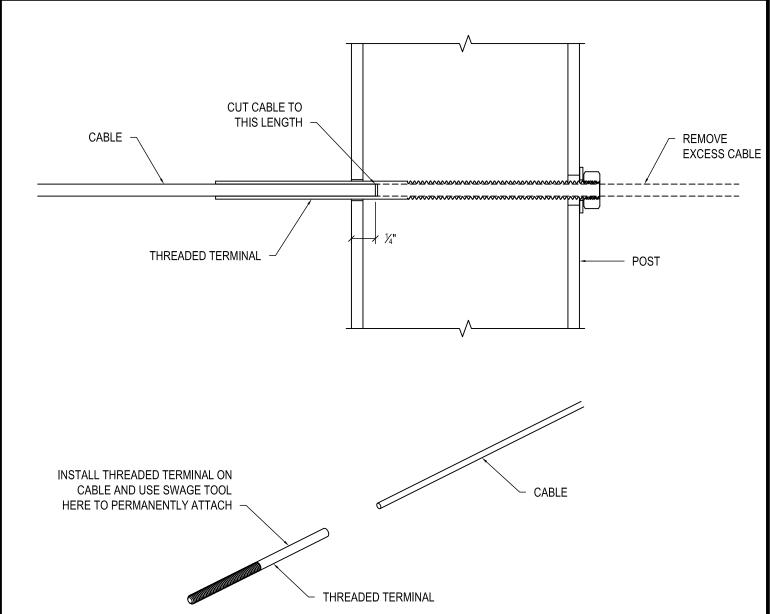

#### THINGS TO NOTE:

- IT IS ADVISED TO APPLY ANTI-SEIZE OR WD-40 TO THE THREADS ON THE THREADED TERMINAL PRIOR TO INSTALLING THE NUT AND WASHER.
- INSTALL NUT AND WASHER AS SHOWN AND PLACE THREADED TERMINAL INTO POST.
- DETERMINE THE DEPTH OF THE RECESSED END OF THE TERMINAL.
- CUT THE CABLE TO THE LENGTH DETERMINED, THEN REMOVE THREADED TERMINAL FROM POST.
- INSERT THREADED TERMINAL ONTO CABLE, USE THE SWAGE TOOL AS REQ'D TO ATTACH TERMINAL.
- SLIDE TERMINAL THROUGH HOLES IN POST AND LOOSELY INSTALL NUT AND WASHER.
- ONLY TIGHTEN CABLES AFTER ALL TOP AND BOTTOM RAILS HAVE BEEN INSTALLED.
- TIGHTEN THE CABLES ALTERNATING FROM TOP TO BOTTOM MOVING TOWARDS THE MIDDLE CABLE, SIMILAR TO TIGHTENING LUG NUTS ON A WHEEL INSTEAD OF GOING IN A CIRCLE.

#### **DRAWING TITLE:**

STEP 5: CABLE INFILL

DATE: 4/16/2020 DRAWN BY: TJC

